

PRP-085

Thermal Receipt Printer



INTRODUCING THE HIGH-SPEED THERMAL RECEIPT PRINTER



The Idealpos PRP-085 Thermal Receipt Printer is a high volume hardworker for bars, kitchens and much more. Programmed to include network printing applications and flexible functions for English and/or Chinese prints, the PRP-085 is a revolution.

With a powerful 32-bit CPU and a quality SEIKO printer head, printing of receipts, logos and barcodes has become fuss-free with this speedy print machine. Available NOW in USB, Parallel, Serial and/or Ethernet options, the Idealpos PRP-085 is an irresistible option for bustling businesses.



PRP-085

Thermal Receipt Printer



Transparent Cover

■ Features

Supports Logo Image Download

The PRP-085 supports logo image download to printer memory.

High Speed Printing

The PRP-085 utilises a 32-Bit CPU and a printer head that prints at a high speed of 220mm per second.

Diverse Printing Characters


The PRP-085 has the options to print character in Chinese, Japanese and Korean.

Versatile Cutter Mechanism


Build in with auto cutter mechanism, the PRP-085 supports both full-cut and partial-cut modes.



Interface Connection

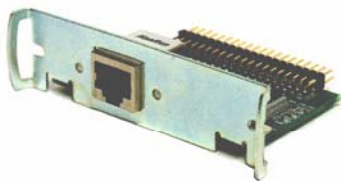

Ethernet Connection

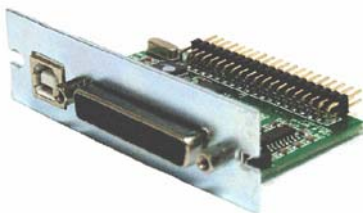

Serial & USB Connection

Specification	Description
Graphic Printing	Support logo images download
Printing Method	Thermal line printing
Print Head Speed	220 mm per second
Paper Width	80.0 mm
Print Columns	576 dots per line
Dot Density	203 dpi. (8 dots per mm)
Print Character	ANK Character Font A: 12*24 dots Font B: 9*17 dots Chinese / Japanese / Korean: 24*24 dots
Languages	PAN European Languages: English, French, German, Danish, Spanish, etc Asian Languages: Japanese, Korean, Chinese
Interface	Parallel / Serial (RS232C) / USB / Ethernet
Cutter	Full or Partial Cuts
Printer Head Reliability	100 Km
Power Supply	DC 12V to 24V, 1A
Cash Drawer	DC 12V to 24V solenoid supported
Kitchen Printing	Supported
Paper Thickness	0.06 to 0.08 mm
Dampness	10 to 80%
Supported Barcodes	Mode: UPC-A/UC-E / JAN13(EAN13) / JAN8(EAN8)
Printer Command	ESC / POS compatible
External Dimension	145 x 203 x 135 mm

Your Authorised Dealer:

